

Intensity data:(deg , cd) C120-300

A	I	A	I	A	I	A	I	A	I	A	I
-90.0	2.628	-58.5	408.5	-27.0	1230	4.5	1644	36.0	1140	67.5	262.9
-88.5	2.185	-57.0	449.6	-25.5	1257	6.0	1633	37.5	1098	69.0	162.6
-87.0	1.771	-55.5	494.3	-24.0	1287	7.5	1629	39.0	1058	70.5	35.82
-85.5	1.438	-54.0	542.6	-22.5	1314	9.0	1620	40.5	1024	72.0	9.754
-84.0	1.163	-52.5	594.7	-21.0	1341	10.5	1601	42.0	987.6	73.5	8.139
-82.5	1.069	-51.0	636.7	-19.5	1373	12.0	1583	43.5	952.5	75.0	6.426
-81.0	1.291	-49.5	670.9	-18.0	1405	13.5	1570	45.0	916.4	76.5	4.632
-79.5	1.581	-48.0	703.0	-16.5	1432	15.0	1581	46.5	880.1	78.0	3.492
-78.0	2.102	-46.5	744.6	-15.0	1461	16.5	1545	48.0	835.9	79.5	2.806
-76.5	2.656	-45.0	787.0	-13.5	1495	18.0	1493	49.5	794.7	81.0	2.300
-75.0	3.395	-43.5	830.0	-12.0	1552	19.5	1465	51.0	751.3	82.5	1.779
-73.5	4.433	-42.0	865.9	-10.5	1630	21.0	1439	52.5	707.1	84.0	1.460
-72.0	6.345	-40.5	905.1	-9.0	1598	22.5	1413	54.0	668.4	85.5	1.316
-70.5	8.167	-39.0	939.9	-7.5	1609	24.0	1389	55.5	634.7	87.0	1.484
-69.0	9.419	-37.5	972.6	-6.0	1623	25.5	1358	57.0	590.9	88.5	1.820
-67.5	23.46	-36.0	1003	-4.5	1632	27.0	1331	58.5	535.8	90.0	2.279
-66.0	139.2	-34.5	1042	-3.0	1638	28.5	1305	60.0	485.0		
-64.5	238.6	-33.0	1087	-1.5	1647	30.0	1280	61.5	440.8		
-63.0	281.9	-31.5	1129	0.0	1647	31.5	1251	63.0	398.8		
-61.5	325.2	-30.0	1168	1.5	1650	33.0	1221	64.5	356.1		
-60.0	368.0	-28.5	1204	3.0	1648	34.5	1183	66.0	309.9		

Electricity Parameter:

Current I: 0.2890A Power: 50.00W
Voltage V: 220.0V PF: 0.900


Optical Parameter (Distance=3.000m) :

Diffuse angle: @ (25%): 120.7deg @ (50%): 91.8deg @ (75%): 58.4deg @ (50%): 91.8deg
Diffuse angle: @ (25%): 120.8deg @ (50%): 92.1deg @ (75%): 59.1deg @ (50%): 92.1deg
Imax=1654cd (C=120.0deg,G=2.1deg) C120-300Plane Imax= 1654cd(G=2.1deg)
C120-300Plane I0= 1647cd

Lamp Type:
Tester:Damin
Temperature:25.3deg
Manufacturer:EVERFINE

Luminaires Type:FL-50W-WW
Test Date:2012-03-07
Humidity:65%
Remarks:

Average Illuminance Figure

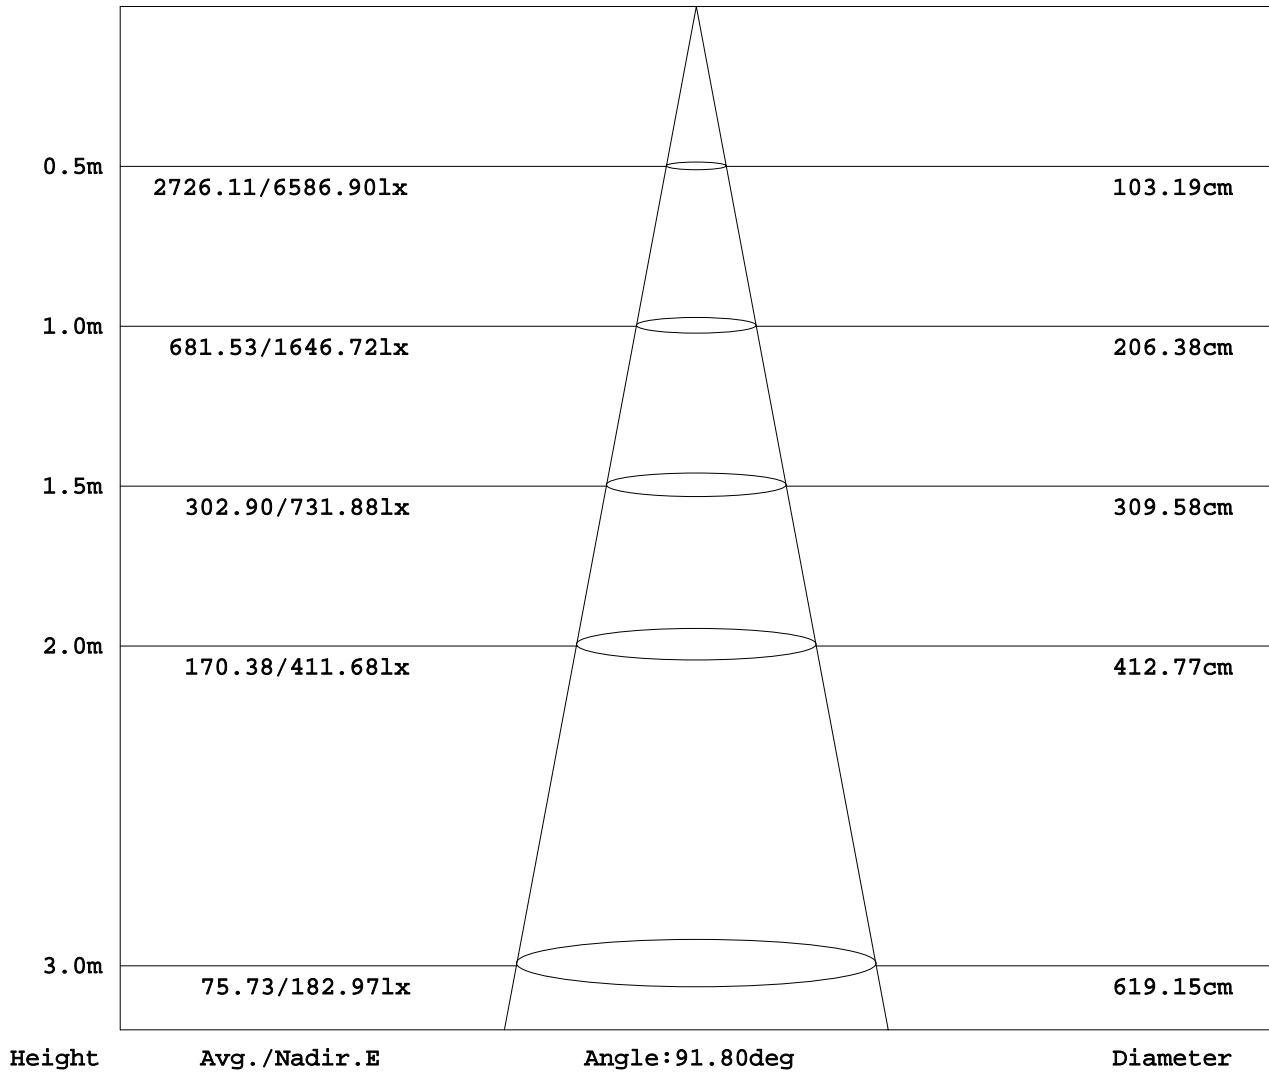

Lamp Type:
Tester:Damin
Temperature:25.3deg
Manufacturer:EVERFINE

Luminaires Type:FL-50W-WW
Test Date:2012-03-07
Humidity:65%
Remarks: