

Intensity data:(deg , cd) C120-300

| A | I | A | I | A | I | A | I | A | I | A | I |
|-------|--------|-------|-------|-------|-------|------|-------|------|-------|------|--------|
| -90.0 | 0.9901 | -58.5 | 93.74 | -27.0 | 198.9 | 4.5 | 253.1 | 36.0 | 181.4 | 67.5 | 41.97 |
| -88.5 | 0.9046 | -57.0 | 103.0 | -25.5 | 203.3 | 6.0 | 252.6 | 37.5 | 177.2 | 69.0 | 18.23 |
| -87.0 | 0.7914 | -55.5 | 114.5 | -24.0 | 207.0 | 7.5 | 250.5 | 39.0 | 172.9 | 70.5 | 5.547 |
| -85.5 | 0.7158 | -54.0 | 124.3 | -22.5 | 211.3 | 9.0 | 248.1 | 40.5 | 168.8 | 72.0 | 1.442 |
| -84.0 | 0.6388 | -52.5 | 131.2 | -21.0 | 215.5 | 10.5 | 245.4 | 42.0 | 165.0 | 73.5 | 1.273 |
| -82.5 | 0.6008 | -51.0 | 136.3 | -19.5 | 219.4 | 12.0 | 242.5 | 43.5 | 161.5 | 75.0 | 1.080 |
| -81.0 | 0.6207 | -49.5 | 140.3 | -18.0 | 223.1 | 13.5 | 239.5 | 45.0 | 157.8 | 76.5 | 0.9236 |
| -79.5 | 0.6393 | -48.0 | 143.7 | -16.5 | 226.7 | 15.0 | 236.2 | 46.5 | 154.4 | 78.0 | 0.8036 |
| -78.0 | 0.7035 | -46.5 | 147.2 | -15.0 | 230.7 | 16.5 | 233.5 | 48.0 | 151.3 | 79.5 | 0.7325 |
| -76.5 | 0.7579 | -45.0 | 150.4 | -13.5 | 234.1 | 18.0 | 229.6 | 49.5 | 148.0 | 81.0 | 0.6859 |
| -75.0 | 0.8715 | -43.5 | 153.8 | -12.0 | 237.4 | 19.5 | 226.4 | 51.0 | 144.4 | 82.5 | 0.6601 |
| -73.5 | 0.9897 | -42.0 | 157.5 | -10.5 | 240.7 | 21.0 | 223.1 | 52.5 | 140.7 | 84.0 | 0.6723 |
| -72.0 | 1.168 | -40.5 | 161.5 | -9.0 | 243.7 | 22.5 | 219.3 | 54.0 | 135.8 | 85.5 | 0.7049 |
| -70.5 | 1.337 | -39.0 | 165.1 | -7.5 | 245.9 | 24.0 | 215.2 | 55.5 | 129.8 | 87.0 | 0.7561 |
| -69.0 | 1.621 | -37.5 | 168.9 | -6.0 | 248.2 | 25.5 | 211.3 | 57.0 | 121.6 | 88.5 | 0.8539 |
| -67.5 | 6.962 | -36.0 | 173.3 | -4.5 | 250.3 | 27.0 | 207.5 | 58.5 | 110.4 | 90.0 | 0.9915 |
| -66.0 | 20.77 | -34.5 | 177.4 | -3.0 | 251.9 | 28.5 | 203.2 | 60.0 | 99.31 | | |
| -64.5 | 44.14 | -33.0 | 181.3 | -1.5 | 252.3 | 30.0 | 198.7 | 61.5 | 90.92 | | |
| -63.0 | 68.72 | -31.5 | 185.6 | 0.0 | 253.3 | 31.5 | 194.6 | 63.0 | 83.43 | | |
| -61.5 | 79.30 | -30.0 | 189.9 | 1.5 | 254.1 | 33.0 | 190.3 | 64.5 | 76.18 | | |
| -60.0 | 86.33 | -28.5 | 194.2 | 3.0 | 253.7 | 34.5 | 185.7 | 66.0 | 66.49 | | |

Electricity Parameter:

Current I: 0.0540A Power: 10.00W
Voltage V: 220.0V PF: 0.850


Optical Parameter (Distance=3.000m) :

Diffuse angle: @ (25%): 129.3deg @ (50%): 109.4deg @ (75%): 62.4deg @ (50%): 109.4deg
Diffuse angle: @ (25%): 129.4deg @ (50%): 109.5deg @ (75%): 63.0deg @ (50%): 109.5deg
Imax=254.3cd (C=120.0deg,G=2.3deg) C120-300Plane Imax= 254.3cd(G=2.3deg)
C120-300Plane I0= 253.3cd

Lamp Type:
Tester:Damin
Temperature:25.3deg
Manufacturer:EVERFINE

Luminaires Type:FL-10W-WW
Test Date:2012-03-07
Humidity:65%
Remarks:

Average Illuminance Figure

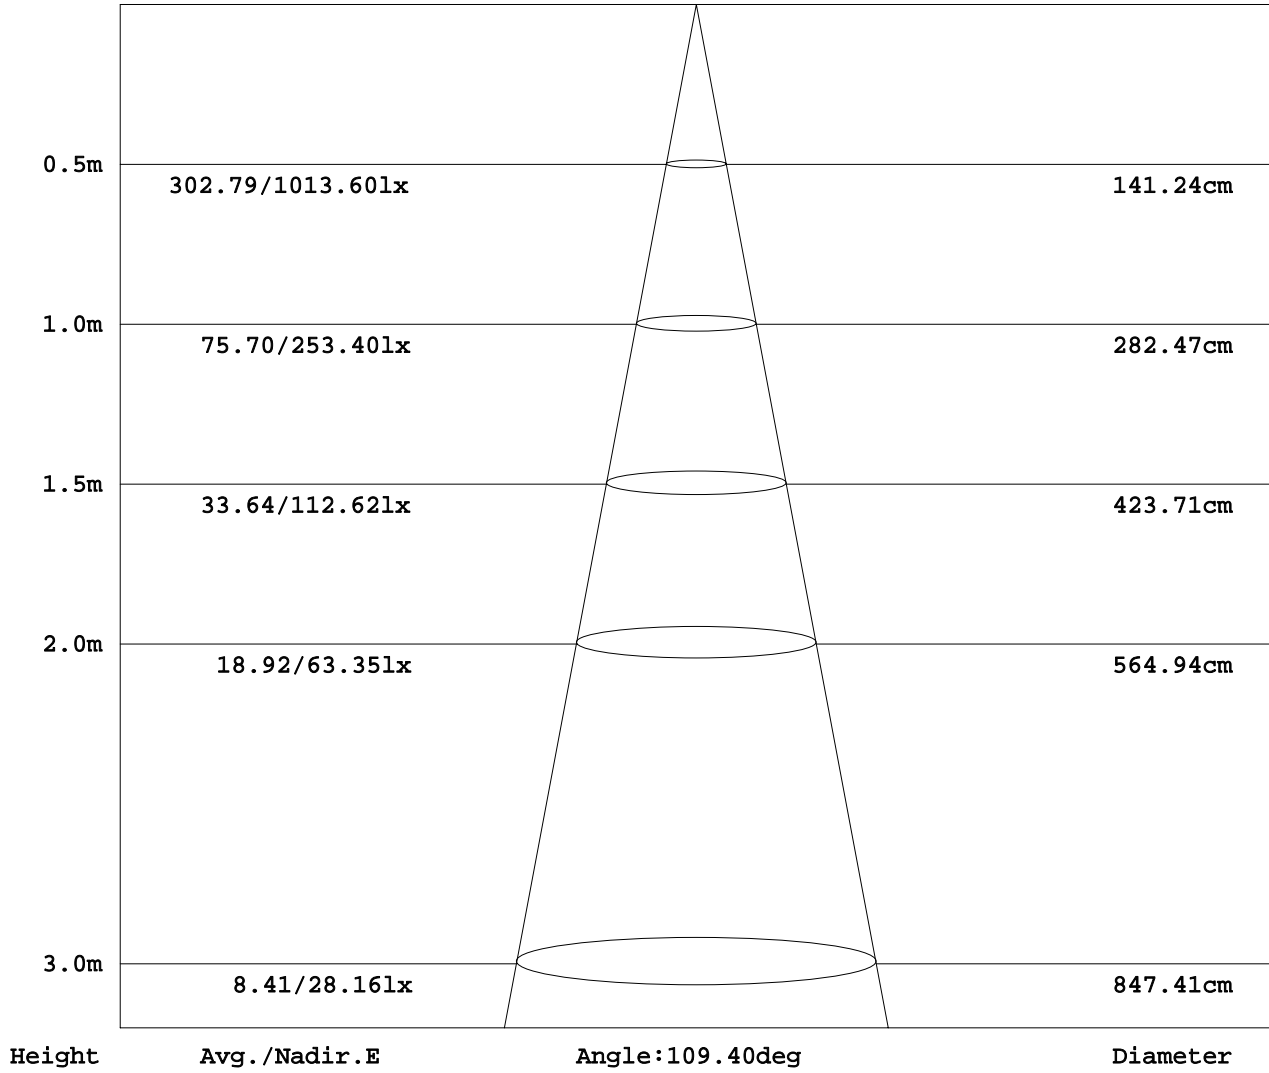

Lamp Type:
Tester:Damin
Temperature:25.3deg
Manufacturer:EVERFINE

Luminaires Type:FL-10W-WW
Test Date:2012-03-07
Humidity:65%
Remarks: